


⚠ The battery keep away from children to prevent them from swallowing it. Mercury free silver oxide battery is forbidden to work in short circuit, which will cause explosion. Batteries should be stored in a dry environment. If it is stored in warehouse, the wet ground should be isolated. Do not charge the battery. The battery Keep away from fire.

Battery standard storage environment: $T22\text{ }^{\circ}\text{C} \pm 2^{\circ}\text{C}$, $\rho w, \max \leq 75\%$.

バッテリーを飲み込むのを防ぐために、子供たちは離れています。水銀のない酸化銀バッテリーは、短絡を引き起こすことを禁じられます。そして、それは爆発を引き起こします。倉庫に保管すれば湿った地面を隔離すべきである。バッテリーを充電しないでください。バッテリー標準的な貯蔵環境: $T22\text{ }^{\circ}\text{C} \pm 2^{\circ}\text{C}$, $\rho w, \max \leq 75\%$ 。

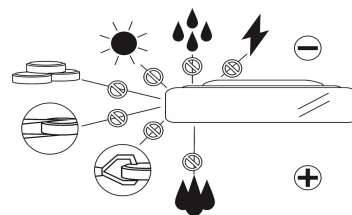

COMSAN SR626SW 0%Hg Specifications

Ag₂O-Zinc

ボタン型酸化銀電池



Button type silver oxide batteries



水銀のない環境保護の高容量電池ブランドは
Mercury free environmental protection high capacity battery brand,

外形寸法
Dimensions(mm)


SR626SW

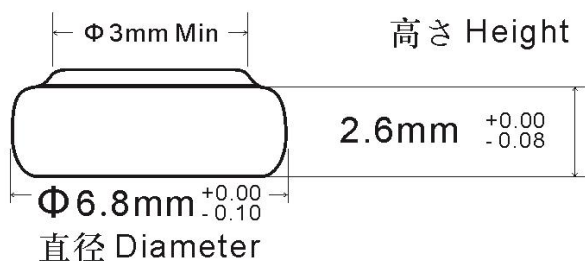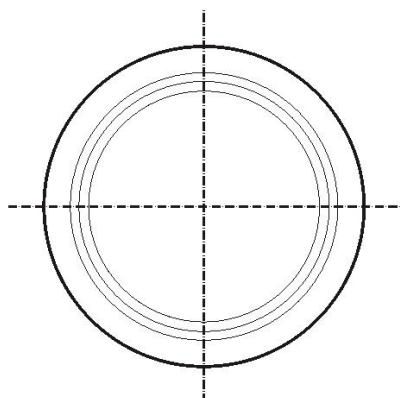


◎ブランドの印 Brand marks:




◎用途 Applications:



◎バッテリー構造 Battery structure:

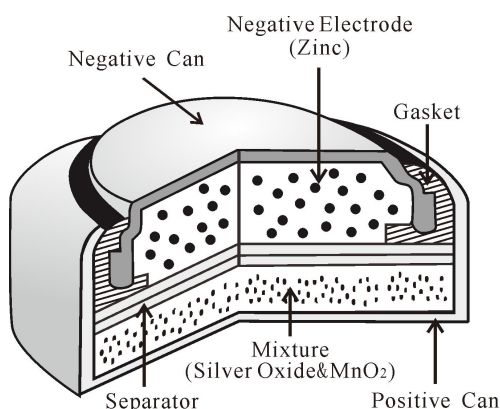


◎放電特性 Discharge characteristics

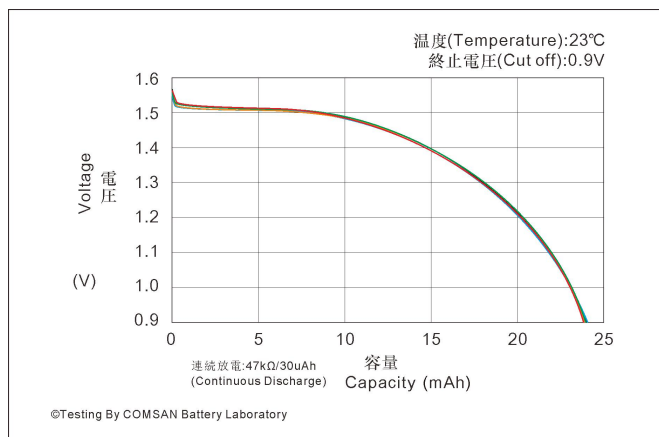

◎定格 Specifications

COMSAN® SR626SW 0%Hg	N.W. : 0.36 (g)
無負荷電圧 Open-Circuit Voltage: $\geq 1.58V$	
公称電圧 Rated Voltage: 1.55V	
終止電圧 End Voltage: 0.9V	
作業温度範囲 Operating Temp: -20°C to 60°C	
貯蔵放電 Self Discharge: $\leq 5\%$ / year	
腕時計標準作業電流 Watch operating current: $\leq 1.2\mu A$	
定電流放電時間 Discharge Time: $\approx 20,000\text{Hours}/833\text{days}$	
標準高速放電	
Normal Continuous Discharge: 47kΩ/30uA to 0.9 volts	
初期負荷電圧	
Load Voltage: $\geq 1.55V$	
標準容量	
Capacity: 24mAh	
高速放電時間	
Normal Discharge Time: $\geq 800\text{Hours}$	
標準環境における貯蔵寿命	
Storage life in standard environment: 3years	

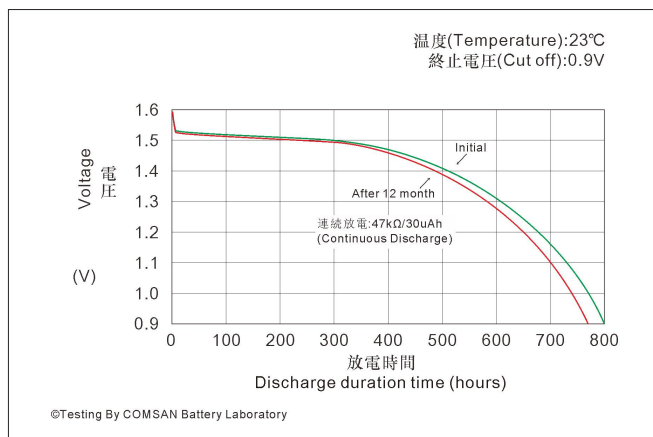

記載のデータ及び数値は、参考値であり保証値ではありません。
Data is not guaranteed, and is provided for reference purposes only.



◎認証書を請求する Request certification report: 0086 13928897613 Judy

